CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MI	TIGA	TION INFORMATION					
PREMISES #:		SUBJECT OF INSURANCE: Lake	Clarke Gardens COA, Inc.	POLICY #:			
BUILDING #:	12	STREET ADDRESS: 2615 S. Garden Drive - Bldg # 12 Lake Worth, FL 33401					
# STORIES:	4	BLDG DESCRIPTION: 2615 S. Garden Drive - Bldg # 12					
BUILDING TY	PE:	X (4 to 6 stories)	ore stories)				
•		ategory must be provided for each in					
I hereby certify Florida Building	that the Code i	building or unit at the address indicates (Check One): X Exposure C or	ted above TERRAIN EXPOSURE CATEO Exposure B	GORY as defined under the			
Certification be premises.	low fo	purposes of TERRAIN EXPOSURE	CATEGORY above does not require	personal inspection of the			
Certification Built On or After			basic wind speed of the location (Comple	te for Terrain B only if Year			
			ding or unit at the address indicated abov (Check One):				
			Idings is constructed in a manner to excrain B only if Year Built On or After Jan.1,				
I hereby certi (FBC) WIND D	fy that	the building or unit at the address ind l of (Check One):	icated above is designed and mitigated to £110 or	o the Florida Building Code			
Certification for inspection of the			SPEED or WIND SPEED DESIGN above	e does not require personal			
Specify the type o	f miti	ation device(s) installed:					
IOTE: Any docur	nentat m. At	on used in validating the complian	nce or existence of each constructio existence of each visible and access is form.				

1. Roof Coverings

Roof Covering Material: Tar & Gravel (Flat) Date of Installation: 1998 (b98000506, 1/8/1998)

|X| Level A (Non FBC Equivalent) – Type II or III

One or more roof coverings that do not meet the FBC Equivalent definition requirements below.

Level B (FBC Equivalent) – Type II or III

Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofing, or other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the 1994 South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was current at the time of installation.

All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems), and asphalt roof coverings on flat roofs must be 10 years old or less.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

	Roof Deck Attachment					
	Level A – Wood or Other Deck Type II only Roof deck composed of sheets of structural panels (plywood or OSB). Or					
	Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or					
	Other roof decks that do not meet Levels B or C below.					
	Level B – Metal Deck Type II or III Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.					
	Level C – Reinforced Concrete Roof Deck Type, II or III A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.					
3.	Secondary Water Resistance N/A					
	Underlayment A self-adhering polymer modified bitumen roofing underlayment (min rubber sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all players aro SB joints to protect from water intrusion. All secondary water resistance products must be installed partine manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance.					
	Foamed Adhesive A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.					
	industri.					
	Oneming Protection					
4.	Opening Protection N/A					
	Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant planing that most the Lorge Missile (Olb.) impact requirements of					
	doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:					
	□SSTD12;					
	☐SSTD12; ☐ASTM E 1886 and ASTM E 1996;					
	☐SSTD12; ☐ASTM E 1886 and ASTM E 1996; ☐Miami-Dade PA 201, 202, and 203;					
	☐SSTD12; ☐ASTM E 1886 and ASTM E 1996;					
	☐SSTD12; ☐ASTM E 1886 and ASTM E 1996; ☐Miami-Dade PA 201, 202, and 203;					
	□SSTD12; □ASTM E 1886 and ASTM E 1996; □Miami-Dade PA 201, 202, and 203; □Florida Building Code TAS 201, 202 and 263. All glazed openings less than 30 feet above grade snall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Felocity Hurricane Zone) all glazed openings greater than 60 feet above					
	□SSTD12; □ASTM E 1886 and ASTM E 1996; □Miami-Dade PA 201, 202, and 203; □Florida Building Code TAS 201, 202 and 263. All glazed openings less than 30 feet above grade snall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Felocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard. □ Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant					

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION

BUILDING TYPE II AND III MITIGATION INSPECTION FORM

CERTIFICATION

	•	ECK ONE OF THE FOLLOWING	,	
☐ General or build	ling contractor licensed ur	nder Section 489.111, Florida St	atutes.	
☐ Building code in	nspector certified under Se	ection 468.607, Florida Statutes		
☐ Professional are	chitect licensed under Sec	tion 481.213, Florida Statutes.		
☐ Professional en	gineer licensed under Sec	tion 471.015, Florida Statutes.		
,	Form. In my professional opinion	at the Location Address listed above on, based on my knowledge, information		•
structural or physical or to receive a property other purpose. The ur nothing in this Form s	characteristics exist at the Locati insurance premium discount on indersigned does not make a he hall be construed to impose on	set forth in it are provided solely for Address listed above and for the particular insurance provided by Citizens Provided by Citizens Provided for safety certification or warrant the undersigned or on any entity to do r to any other person or entity.	ourpose of permoderity Insurance ty, express or i	nitting the Named Insured e Corporation and for no implied, of any kind, and
lame of Company: Brad Davis for Don Meyler Inspections			Phone:	(954) 749-7099
lame of Inspector	Brad Davis	License Type General	License #	CGC1505649
nspection Date:	7/15/2020			
Signature:	Brodford J. Q.		Date:	7/15/2020
Applicant /Insured's Signature *:			Date:	7/15/2020
		Board President and another m	ambar af tha	beard for souds and

homeowner's associations or an officer of the named insured for all other business entities.

[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

















Left

Right












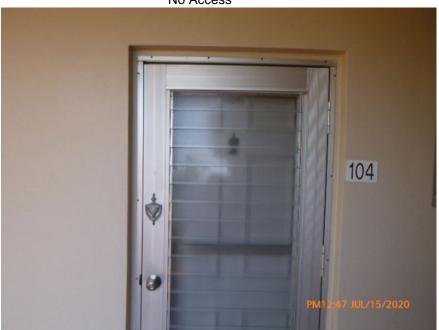

Wood Rafters




Solid Door

Unprotected Window













Unverified Roll Down Shutter



Unverified Roll Down Shutter

Unverified Impact Window







No Protection



Tar & Gravel



Tar & Gravel